


DIN 404 / A1

Viti a testa cilindrica

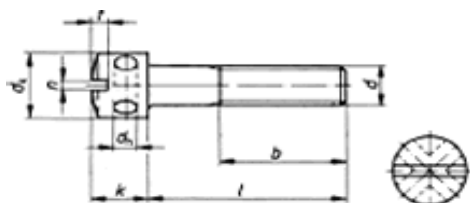

| d | M 3 | M 4 | M 5 | M 6 |
|-------------------|------------|------------|-----------|-----------|
| l / mm | | | | |
| 4 | ● | | | |
| 5 | ● | ● | | |
| 6 | ● | ● | | |
| 8 | ● | ● | ● | |
| 10 | ● | ● | ● | ● |
| 12 | ● | ● | ● | ● |
| 16 | ● | ● | ● | ● |
| 20 | ● | ● | ● | ● |
| 25 | | ● | ● | ● |
| 30 | | ● | ● | ● |
| CONFEZIONE | 200 | 100 | 50 | 50 |
| b | 19 | 22 | 25 | 28 |
| k | 4 | 5 | 6,5 | 8 |
| dk | 5,5 | 7 | 8,5 | 10 |
| n | 0,8 | 1 | 1,2 | 1,6 |
| t min | 1 | 1,4 | 1,7 | 2,2 |
| dh | 1,5 | 2 | 2,5 | 3 |