


DIN 913 / A2


Viti senza testa con cava esagonale

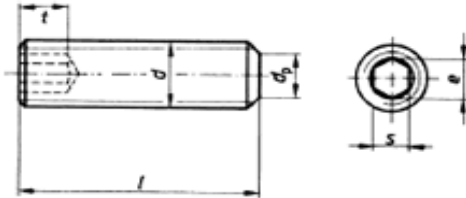

ISO 4026

d	M 1,6	M 2	M 2,5	M 3	M 4	M 5
l / mm						
2	●	●				
3	●	●	●	●	●	
4	●	●	●	●	●	●
5	●	●	●	●	●	●
6	●	●	●	●	●	●
8	●	●	●	●	●	●
10		●	●	●	●	●
12		●	●	●	●	●
14						●
16		●	●	●	●	●
20				●	●	●
25				●	●	●
30				●	●	●
35						●
40				●	●	●
CONFEZIONE	200	500	500	500 ≤ 30	500 ≤ 30	500 ≤ 25
				200 >30	200 >30	200 >25
<i>dp max</i>	0,8	1	1,5	2	2,5	3,5
<i>t min</i>	0,7	0,8	1,2	1,2	1,5	2
<i>e min</i>	0,803	1,003	1,427	1,73	2,3	2,87
<i>s</i>	0,7	0,9	1,3	1,5	2	2,5

Viti senza testa con cava esagonale

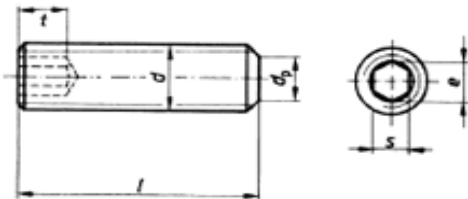

ISO 4026

d	M 6	M 8	M 10	M 12	M 16	M 20
l / mm						
5	●					
6	●	●				
8	●	●				
10	●	●	●			
12	●	●	●	●		
14	●					
16	●	●	●	●	●	
20	●	●	●	●	●	●
25	●	●	●	●	●	●
30	●	●	●	●	●	●
35	●	●	●	●	●	●
40	●	●	●	●	●	●
45	●	●	●	●	●	●
50	●	●	●	●	●	●
55				●		
60	●	●	●	●	●	●
70	●	●	●	●	●	●
80		●	●	●	●	●
90		●	●	●	●	●
100					●	●
CONFEZIONE	200	200	200 ≤ 25	100 ≤ 70	50 ≤ 80	50 ≤ 70
			100 >25	50 >70	25 >80	25 >70
<i>dp max</i>	4	5,5	7	8,5	12	15
<i>t min</i>	2	3	4	4,8	6,4	8
<i>e min</i>	3,44	4,58	5,72	6,86	9,15	11,43
<i>s</i>	3	4	5	6	8	10