


DIN 914 / A4

Viti senza testa con cava esagonale e punta conica

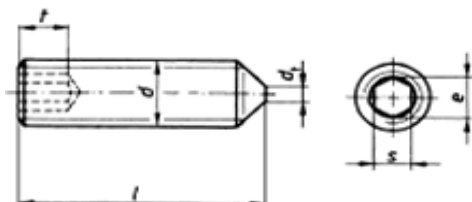

ISO 4027

d	M 3	M 4	M 5	M 6	M 8	M 10	M 12	M 16	M 20
l / mm									
4	●	●							
5	●	●	●						
6	●	●	●	●					
8	●	●	●	●	●				
10	●	●	●	●	●	●			
12	●	●	●	●	●	●	●		
14			●	●					
16	●	●	●	●	●	●	●	●	
20	●	●	●	●	●	●	●	●	●
25	●	●	●	●	●	●	●	●	●
30	●	●	●	●	●	●	●	●	●
35			●	●	●	●	●	●	●
40			●	●	●	●	●	●	●
45				●	●	●	●	●	●
50				●	●	●	●	●	●
60				●	●	●	●	●	●
70							●	●	●
80							●	●	
90							●	●	
100								●	
CONFEZIONE	500	500	500	200	200	200	100	50	50
	≤ 30	≤ 30	≤ 25			≤ 25	≤ 70	≤ 80	≤ 70
	200	200	200			100	50	25	25
	>30	>30	>25			>25	>70	>80	>70
<i>dt max</i>	-	-	-	1,5	2	2,5	3	4	5
<i>t min</i>	1,2	1,5	2	2	3	4	4,5	6,4	8
<i>e min</i>	1,73	2,3	2,87	3,44	4,58	5,72	6,86	9,15	11,43
<i>s</i>	1,5	2	2,5	3	4	5	6	8	10